



Bonfiglioli

Vectron

S2U IP66

Variable Frequency Drive




PRODUCT

 **Bonfiglioli**
Forever Forward



SKSSWEDEN

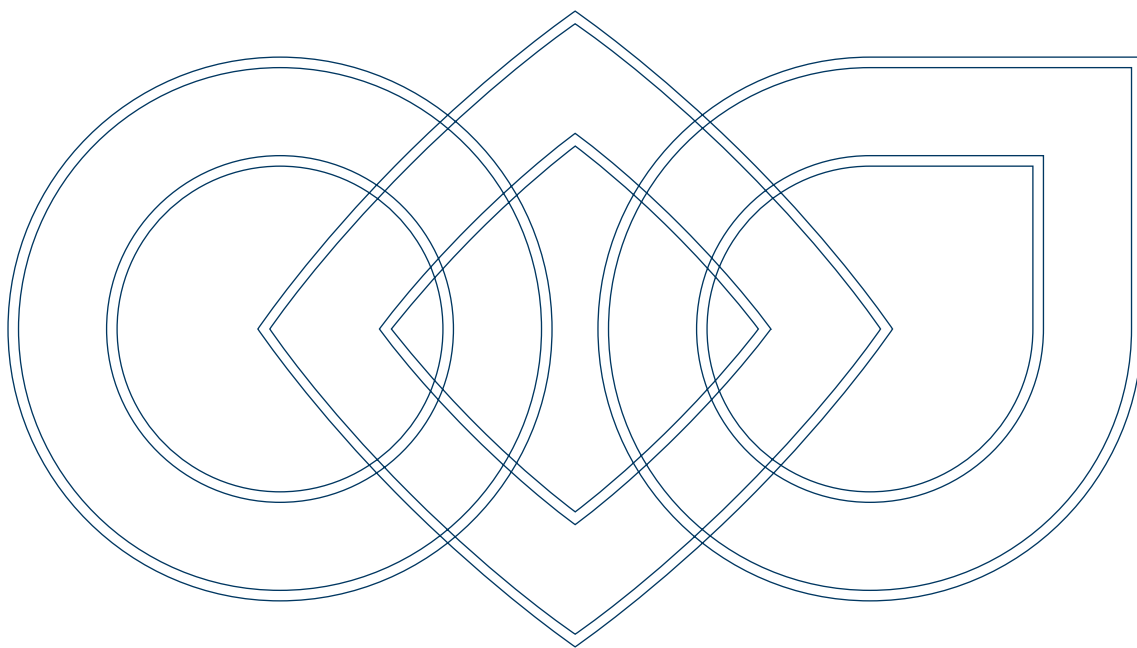

Variable frequency drive: the ideal drive for your lean application projects

Bonfiglioli S2U IP66 drives are designed to be fast to install.

Compact and cost effective, S2U IP66 is suitable for a wide range of machinery applications requiring extreme conditions such as dust, moisture and cleaning chemicals.

S2U IP66 range is made of 3 frame sizes and kW rating from 0.4 kW up to 18.5 kW.

The integrated Keypad makes setup and commission easier.

Thanks to its integrated PLC functions and Ladder language complying with standard IEC61131, S2U IP66 allows the machines to be customised.

Moreover, it can be easily integrated into any control architecture thanks to the built-in Modbus port and the wide range of standard communication configuration protocols available.

Easy Plug in of PC Vplus with S2U Manager is granted via the integrated RJ45 connector for high level commissioning.



Mechatronics - The **Challenge** to build **your Success**

Faster, better and cheaper - this is the new challenge for machine designers!

Increasing demands regarding the productivity of complex system machines, and thus more flexible machines which run at highest efficiency levels, now require new intelligent technical solutions that enhance future growth.

Bonfiglioli has implemented a detailed strategy to precisely achieve this objective!

Mechatronic Drives & Solutions division is born with the mission to improve profitability by acting as a reliable partner and a provider of energy-efficient solutions over the total lifecycle in the field of industrial automation.



SYSTEM
INTEGRATION



EXPERTISE



ENERGY
SAVINGS

Type of applications

- High environmental immunity
- High braking ability without braking resistor
- High torque at low speed
- Heat sink designed for dusty environments



PACKAGING
INDUSTRY



FANS, PUMPS
AND MIXERS



TEXTILE
MACHINES



MATERIALS
HANDLING



WOOD
PROCESSING



FOOD,
BEVERAGE &
TOBACCO



Designation

S2U IP66 series

Basic variants



S2U

400

T

-

21

F

Noise filter
 F Built-in
 (blank) None

Power
 03 0.4 kW
 07 0.75 kW
 11 1.5 kW
 13 2.2 kW
 18 3.7 kW
 19 5.5 kW
 21 7.5 kW
 23 11 kW
 25 15 kW
 27 18.5 kW

Phase number
 S Single phase
 T Three phase

Supply
 230 200-240 V
 400 380-480 V

Series
 S2U inverter S2U

Features

- Sensorless Vector and V/f control
- Motor Auto-tuning function
- Integrated braking transistor for all series
- RTU Modbus RS485 interface through RJ45
- 150% starting torque at 1 Hz
- Carrier frequency: 1~16 kHz
- Firemode
- Accl.and Decel. Control: 4 S curve setting
- 16 preset speeds
- Buil-in PID controller
- Pulse train frequency reference
- Emergency stop function built-in complying with global standard
- Internal PLC functions with Ladder language
- 32 bit CPU
- Integrated EMC filter
- Torque compensation
- Slip compensation

Features



	Features	Benefits
Performance	32 bit Processor with advanced IGBT power switching frequency.	Advanced and accurate sensorless vector control providing high starting torque at low speed.
Intelligence	Built-in PLC functions and PID controller.	Provide accurate control and regulation for frequency, Pressure, Air volume in applications such as HVAC without PLC Programming.
Robustness	IP66 degree protection version rating up to 18.5 kW	Suitable for harsh environment protecting machine from high Pressure water jets from any direction.
Reliability	Built-in EMC filter in compliance with IEC/EN61800-3	Lower electromagnetic interference allowing a safe machine environment.

General technical data

200 V Class: Single phase

Model: S2U230S-□□ F IP66	03	07	11	13
Suitable motor capacity [kW]	0.4	0.75	1.5	2.2
Rated output current [A]	3.1	4.5	7.5	10.5
Rated capacity [KVA]	1.2	1.7	2.90	4.00
Input voltage range [V]	Single Phase: 200~240 V, 50/60 Hz			
Allowable voltage fluctuation	+10%-15%			
Output voltage range [V]	Three phase: 0~240 V			
Input current [A]*	8.5	12	16	23.9
Inverter net weight [kg]	1.65	1.65	2.5	2.5
Allowable momentary power loss time [s]	2.0	2.0	2.0	2.0
Enclosure	IP20/NEMA1&IP66/NEMA4X			

* The input current is calculated value at full rated output current.

400 V Class: Three phase

Model: S2U400T-□□ F IP66	07	11	13	18
Suitable motor capacity [kW]	0.75	1.5	2.2	3.7
Rated output current [A]	2.3	3.8	5.2	8.8
Rated capacity [KVA]	1.7	2.9	4.0	6.7
Input voltage range [V]	Three phase: 380~480 V, 50/60 Hz			
Allowable voltage fluctuation	+10%-15%			
Output voltage range [V]	Three phase: 0~480 V			
Input current [A]*	4.2	5.6	7.3	11.6
Inverter net weight [kg]	1.7	1.7	2.5	2.5
Allowable momentary power loss time [s]	2.0	2.0	2.0	2.0
Enclosure	IP20/NEMA1&IP66/NEMA4X			

* The input current is calculated value at full rated output current.

400 V Class: Three phase

Model: S2U400T-□□ (F) IP66	19	21	23	25	27
Suitable motor capacity [kW]	5.5	7.5	11	15	18.5
Rated output current [A]	13.0	17.5	24	32	40
Rated capacity [KVA]	9.9	13.3	19.1	24	30.5
Input voltage range [V]	Three phase: 380~480 V, 50/60 Hz				
Allowable voltage fluctuation	+10%-15%				
Output voltage range [V]	Three phase: 0~480 V				
Input current [A]*	17	23	31	38	48
Inverter net weight [kg]	6.7	6.7	6.7	13.7	13.7
Allowable momentary power loss time [s]	2.0	2.0	2.0	2.0	2.0
Enclosure	IP20/NEMA1&IP66/NEMA4X				

* The input current is calculated value at full rated output current.



General technical data

IP66 / NEMA 4X Type

Model	Supply voltage (Vac)	(kW)	Filter	Switch	Frame Size
S2U230S-03 F IP66	1 ph 200~240 V +10%-15% 50/60 Hz	0.4	V	V	1
S2U230S-07 F IP66		0.75	V	V	1
S2U230S-11 F IP66		1.5	V	V	2
S2U230S-13 F IP66		2.2	V	V	2
S2U400T-07 F IP66	3 ph 380~480 V +10%-15% 50/60 Hz	0.75	V	V	1
S2U400T-11 F IP66		1.5	V	V	1
S2U400T-13 F IP66		2.2	V	V	2
S2U400T-18 F IP66		3.7	V	V	2
S2U400T-19 F IP66		5.5	V	V	3
S2U400T-21 F IP66		7.5	V	V	3
S2U400T-23 F IP66		11	V	V	3
S2U400T-25 IP66		15	-	-	3
S2U400T-27 IP66		18.5	-	-	3


V: Built-in / - : None

De-rating curves

Curves below show the applicable output current de-rate due to setting of carrier frequency and the ambient operating temperatures of 40 and 50 degrees C.

Frame1/2/3/4

(Single phase: 200 V: 0.4 ... 2.2 kW; Three phase: 400 V: 0.75 ... 18.5 kW)

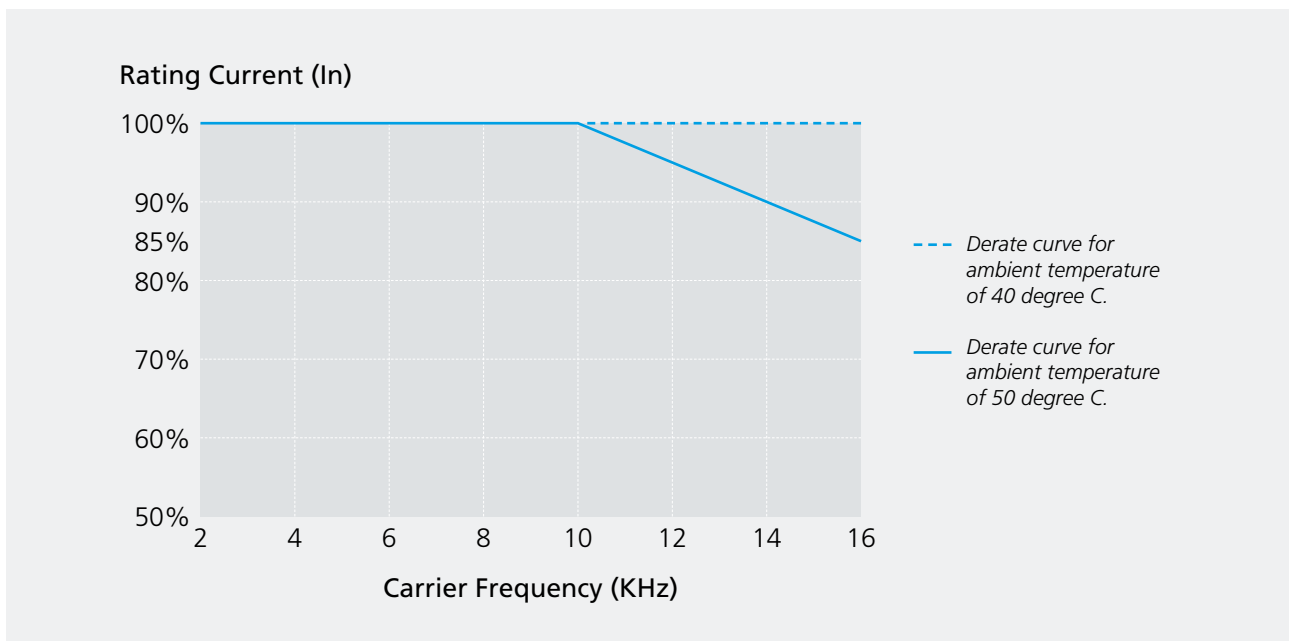

General technical data

CE conformity	The S2U frequency inverters meet the requirements of the low voltage directive 2006/95/EEC and DIN EN 61800-5-1.
EMC directive	For proper installation of the frequency inverter in order to meet the requirements of EN 61800-3, please comply with the installation instructions in these operating instructions.
Interference immunity	The S2U frequency inverters meet the requirements of EN 61800-3 for use in industrial environments.
UL Approval	The frequency inverters are also marked with the UL label according to UL508c, which proves that they also meet the requirements of the CSA Standard C22.2-No. 14.
Ambient temperature	Storage: -20 ... 60 °C (-4 ... 140 °F) Operation: -10 ... 50 °C (14 ... 122 °F) If several inverters are installed in the same Operator panel, ensure adequate spacing and provide the necessary cooling and ventilation for successful operation.
Environmental conditions	Operation: 3K3 (EN60721-3-3) Relative humidity: max 95%, no water condensation Notice prevention of inverter freezing up. (Compliance with IEC 60068-2-78).
Ingress protection rating	IP66
Shock resistance	1 G. (9.8 m/s ²) for 20 Hz and below 0.6 G (5.88 m/s ²) from 20 to 50 Hz (Compliance with IEC 60068-2-6)
Storage	Storage according to EN 50178 After one year of storage, connect the device to mains voltage for 60 minutes.



General technical data


Control Mode		V/F Control, Vector Control
Frequency	Output Frequency	0.01~599.00 Hz
	Starting Torque	150% / 1 Hz (Vector)
	Speed Control Range	1:50
	Setting resolution	Digital input: 0.01 Hz Analog input: 0.06 Hz / 60 Hz
	Setting	Keypad: Set directly with ▲ ▼ keys or the VR on the keypad External Input Terminlas: AI1 (0/2~10 V), AI2 (0/4~20 mA) input Multifunction input up/down function(Group3) Setting frequency by communication method.
	Frequency limit	Lower and upper frequency limits 3 skip frequency settings.
Run	Operation set	Keypad run, stop button
		External terminals: Multi- operation-mode 2 / 3 wire selection Jog operation
		Run signal by communication method.
Main Control Features	V / F curve setting	18 fixed curves and one customized curve
	Carrier frequency	1~16 kHz
	Acceleration and deceleration control	2 off Acc / Dec time parameters. 4 off S curve parameters.
	Multifunction input	29 functions (refer to description on group 3)
	Multifunction output	21 functions (refer to description on group 3)
	Multifunction analog output	5 functions (refer to description on group 4)
	Main features	Overload Detection, 16 preset speeds, Auto-run, Acc/Dec Switch (2 Stages), Main/Alt run Command select, Main/Alt Frequency Command select, PID control, torque boost, V/F start Frequency, Fault reset, Firemode.

General technical data


Display	LED	Display: parameter / parameter value / frequency / line speed / DC voltage / output voltage / output current / PID feedback / input and output terminal status / Heat sink temperature / Program Version / Fault Log.
	LED Status Indicator	Run / Stop / Forward / Reverse ,and etc.
Protective Functions	Overload Protection	The relays to protect the motor and the inverter. (150%/1min)
	Over voltage	220 V: >410 V, 380 V: >820 V
	Under Voltage	220 V: <190 V, 380 V: <380 V
	Momentary Power Loss Restart	Inverter auto-restart after a momentary power loss.
	Stall Prevention	Stall prevention for Acceleration/ Deceleration/ Operation.
	Short-circuit output terminal	Electronic Circuit Protection
	Grounding Fault	Electronic Circuit Protection
	Other protection features	Protection for overheating of heat sink. The carrier frequency decreasing with the temperature function, fault output, reverse prohibit, prohibit for direct start after power up and error recovery, parameter lock up
	All frames include brake transistor	
Communication control	Standard built-in RS485 communication (Modbus), One to one or One to many control.	

Dimensions


Frame 1
(Weight: 2.9 kg)

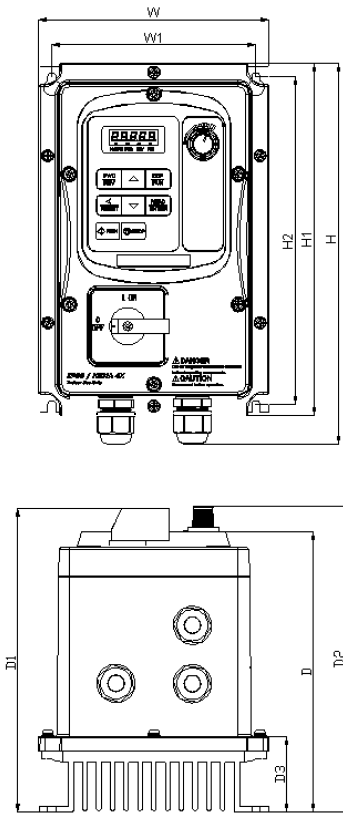

Frame 2
(Weight: 5.98 kg)

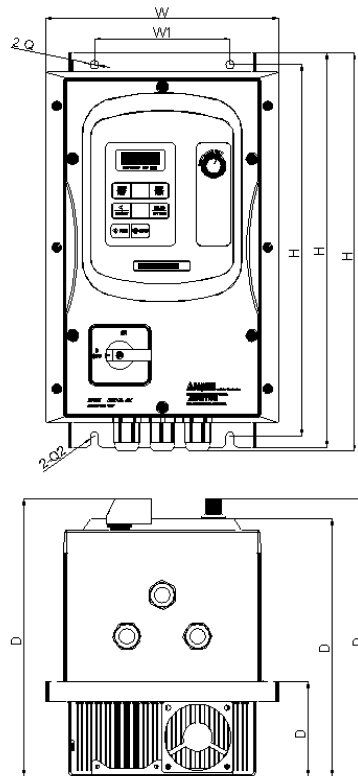


Frame 3
(Weight: 12.68 kg)

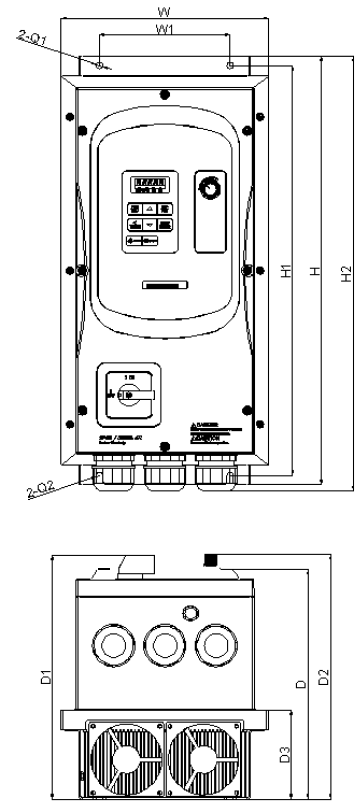

Frame	W	W1	H	H1	H2	D	D1	D2	D3	Q1	Q2	Q3
[mm]												
1	150.8	133.3	248.7	230.2	214.2	183	200	200	49.5	5.4	5.4	10.6
2	198	115	337.9	335	315	218.4	235.2	235.2	79.8	7	7	5.98
3	222.8	140	466.3	460	440	246.6	266.5	263.5	96	7	7	12.68

Bonfiglioli worldwide presence

Bonfiglioli is located in regions and countries around the world that enable us to provide faster sales and service to customers.
We are around the world, and around the corner.

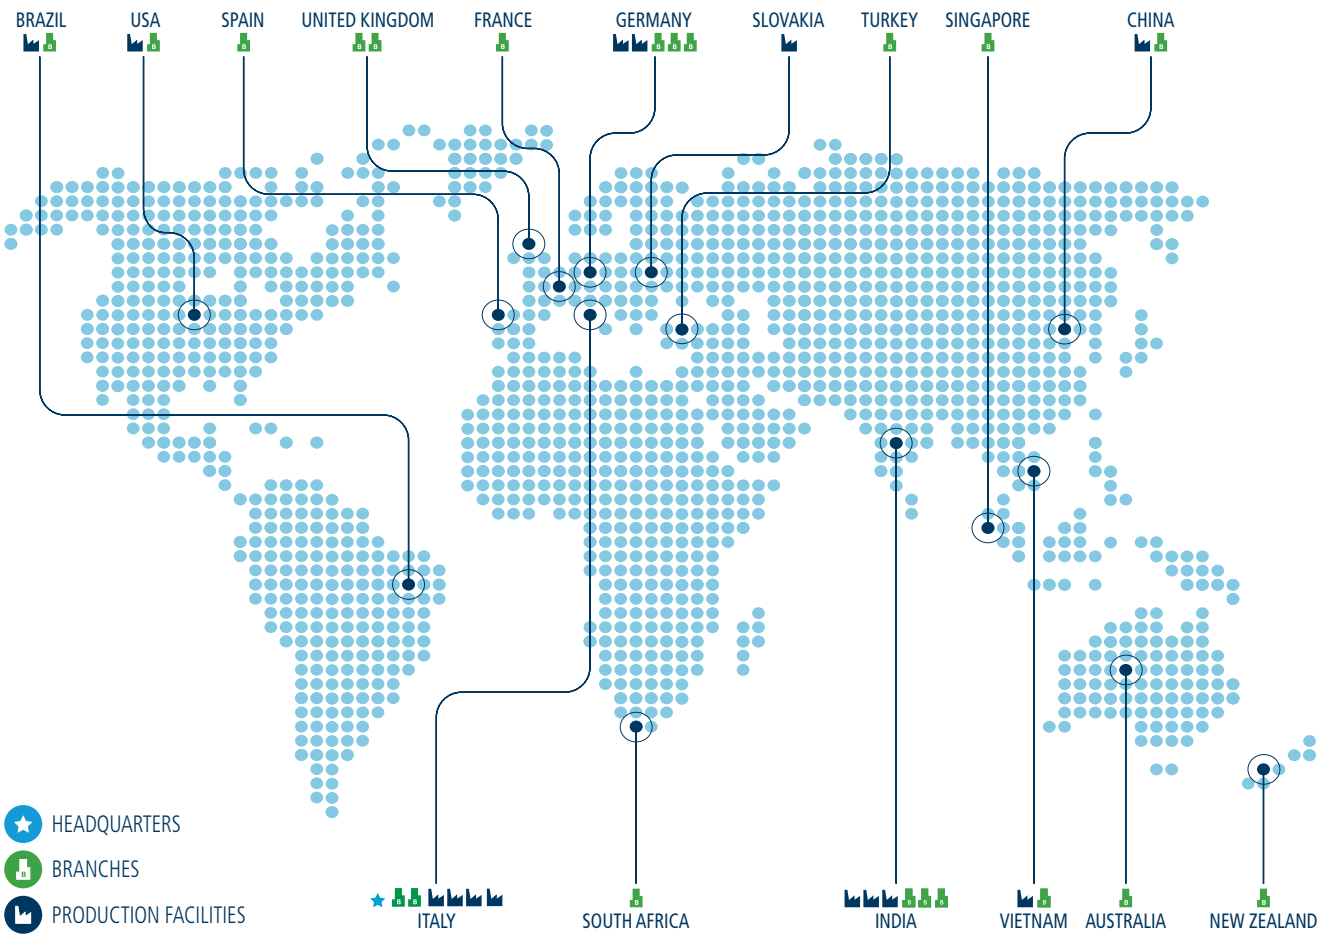

LOCAL SUPPORT
 Sales, Customer Service,
 Warranty, Tech support,
 Spare parts



**21 BRANCH OFFICES
 IN 15 COUNTRIES**



**WORLDWIDE
 DISTRIBUTION
 NETWORK**



Bonfiglioli worldwide locations

Australia

www.bonfiglioli.com.au
2, Cox Place Glendenning NSW 2761
Locked Bag 1000 Plumpton NSW 2761
Tel. + 61 2 8811 8000

Brazil

www.bonfigliolidobrasil.com.br
Travessa Cláudio Armando 171
Bloco 3 - CEP 09861-730 - Bairro Assunção
São Bernardo do Campo - São Paulo
Tel. +55 11 4344 2322

China

www.bonfiglioli.cn
Bonfiglioli Drives (Shanghai) Co., Ltd.
#68, Hui-Lian Road, QingPu District,
201707 Shanghai
Tel. +86 21 6700 2000

France

www.bonfiglioli.fr
14 Rue Eugène Pottier
Zone Industrielle de Moimont II - 95670 Marly la Ville
Tel. +33 1 34474510

Germany

www.bonfiglioli.de
Sperberweg 12 - 41468 Neuss
Tel. +49 0 2131 2988 0

Industrial

Europark Fichtenhain B6 - 47807 Krefeld
Tel. +49 0 2151 8396 0

O&K Antriebstechnik

Ruhrallee 8-12 - 45525 Hattingen
Tel. +49 0 2324 2050 1

India

www.bonfiglioli.in
Mobile, Wind
Bonfiglioli Transmissions Pvt. Ltd.
Plot No. AC7-AC11, SIDCO Industrial Estate,
Thirumudivakkam - 600 044 Chennai
Tel. +91 44 2478 1035

Industrial

Survey No. 528, Porambakkam High Road,
Mannur Village, Sriperambudur Taluk - 602 105 Chennai
Tel. +91 44 6710 3800
Plot No. A-95, Phase IV, MIDC Chakan, Village Nighoje
Pune, Maharashtra - 410 501

Italy

www.bonfiglioli.it
Headquarters
Bonfiglioli Riduttori S.p.A.
Via Giovanni XXIII, 7/A
Lippo di Calderara di Reno - 40012 Bologna
Tel. +39 051 647 3111

Mobile, Wind

Via Enrico Mattei, 12 Z.I. Villa Selva - 47100 Forlì
Tel. +39 0543 789111

Industrial

Via Bazzane, 33/A - 40012 Calderara di Reno
Tel. +39 051 6473111
Via Trinità, 1 - 41058 Vignola
Tel. +39 059 768511
Via Sandro Pertini lotto 7b - 20080 Carpiano
Tel. +39 02 985081

Bonfiglioli Mechatronic Research

Via F. Zeni 8 - 38068 Rovereto
Tel. +39 0464 443435/36

New Zealand

www.bonfiglioli.co.nz
88 Hastie Avenue, Mangere Bridge, 2022 Auckland
PO Box 11795, Ellerslie
Tel. +64 09 634 6441

Singapore

www.bonfiglioli.com
24 Pioneer Crescent #02-08
West Park Bizcentral - Singapore, 628557
Tel. +65 6268 9869

Slovakia

www.bonfiglioli.com
Robotnícka 2129
Považská Bystrica, 01701 Slovakia
Tel. +421 42 430 75 64

South Africa

www.bonfiglioli.co.za
55 Galaxy Avenue, Linbro Business Park - Sandton
Tel. +27 11 608 2030

Spain

www.tecnotrans.bonfiglioli.com
Tecnotrans Bonfiglioli S.A.
Pol. Ind. Zona Franca, Sector C, Calle F, nº 6
08040 Barcelona
Tel. +34 93 447 84 00

Turkey

www.bonfiglioli.com.tr
Atatürk Organize Sanayi Bölgesi, 10007 Sk. No. 30
Atatürk Organize Sanayi Bölgesi, 35620 Çiğli - İzmir
Tel. +90 0 232 328 22 77

United Kingdom

www.bonfiglioli.co.uk

Industrial

Unit 7, Colemeadow Road
North Moons Moat - Redditch, Worcestershire B98 9PB
Tel. +44 1527 65022

Mobile, Wind

3 - 7 Grosvenor Grange, Woolston
Warrington - Cheshire WA1 4SF
Tel. +44 1925 852667

USA

www.bonfiglioliusa.com
3541 Hargrave Drive
Hebron, Kentucky 41048
Tel. +1 859 334 3333

Vietnam

www.bonfiglioli.vn
Lot C-9D-CN My Phuoc Industrial Park 3
Ben Cat - Binh Duong Province
Tel. +84 650 3577411





We have a relentless commitment to excellence, innovation and sustainability. Our team creates, distributes and services world-class power transmission and drive solutions to keep the world in motion.



HEADQUARTERS

Bonfiglioli Riduttori S.p.A.
Via Giovanni XXIII, 7/A
40012 Lippo di Calderara di Reno
Bologna (Italy)
tel: +39 051 647 3111
fax: +39 051 647 3126
bonfiglioli@bonfiglioli.com
www.bonfiglioli.com

